

SPAAN


MADE IN
SPAIN

HYOSUNG AQUILA GV 125/250

SISSYBAR / LUGGAGE RACKS MOUNTING INSTRUCTIONS

Sideplates

Remove the chrome trims that are on both the sides of the rear fender. In its posterior inner part, trims have two anchors in which the side plates of SPAAN sissybar must be fixed (Figure 1). Place the $\text{Ø}16 \times 4 \times \text{Ø}8$ separators bushings between the trim thread and the side plates of SPAAN sissybar. Secure the assembly with **M8x20** screws that are included in the SPAAN kit. Once the SPAAN sissybar sides plates are fixed, the trims must be placed in their respective places.

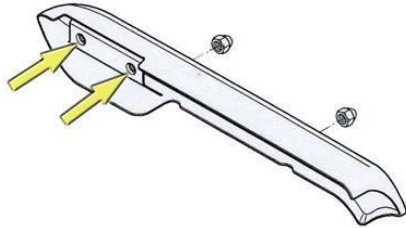

Sissybar uprights – luggage rack arch

Fix the sissybar upright (high or low), or in case of a luggage rack or luggage rack TC, the luggage rack arch to the sideplates SPAAN with the four screws **M6x20**. Put **M6** nuts from the inside.



Rack

For installation in luggage racks kits or in any sissybars of our brand SPAAN. We must place it the inside of the small arch or the sissybar uprights and fix the assembly with the 4 screws **M6x20** and nuts **M6** included in the original kit. **In all LUGGAGE RACKS is required to mount the luggage rack arch**, to give more rigidity to the assembly.



Pad

Join the set with four screws **M5x10** that accompany the kit. (In the back of the pad is marked with four holes in the fabric the position of the threads).

