


KEEWAY SUPERLIGHT 125/STD (No Keeway Superlight 125LE / LTD) SISSYBAR / LUGGAGE RACKS MOUNTING INSTRUCTIONS

(1) Sideplates

The sissybar mounting plates **SPAAN** must be placed on the side supports that flank the rear fender. Remove the screws that secure the supports. The side supports of the sissybar must be placed on them. They must be secured with the original screws.

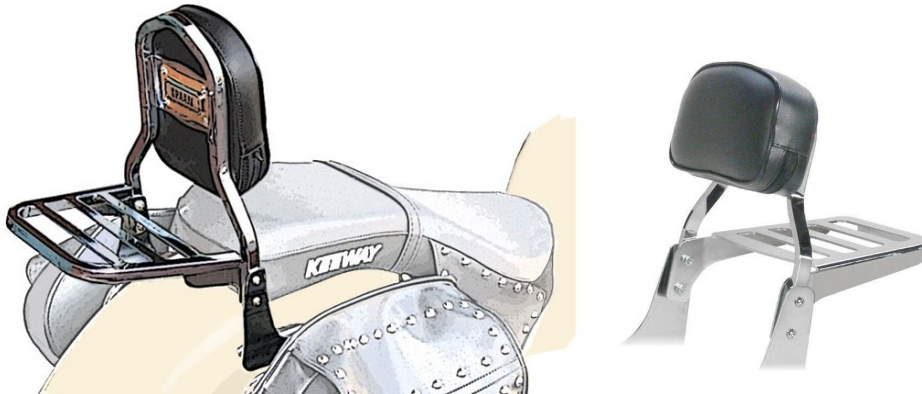

(2) Sissybar uprights – luggage rack arch

Fix the sissybar upright (high or low), or in case of a luggage rack or luggage rack **TC**, the luggage rack arch to the sideplates **SPAAN** with the four screws **M6x20**. Put **M6** nuts from the inside.

(3) Rack

For installation in luggage racks kits or in any sissybars of our brand **SPAAN**. We must place it the inside of the sissybar uprights or the small arch and fix the assembly with **4** screws **M6x20** and nuts **M6** included in the kit. **In all LUGGAGE RACKS is required to mount the small arch**, to give more rigidity to the assembly.



(4) Pad

Join the set with four screws **M5x10** that accompany the kit. (In the back of the pad is marked with four holes in the fabric the position of the threads).

