

# SPANN

## TRIUMPH BONNEVILLE

### Luggage Rack Mounting instructions

Rack is anchored at the front in the screw that locks the damper. On the back, in the "A" plates that are fixed in threaded anchors rear cross plate going under the seat.

**-Remove the seat:** Will secured by two screws at the bottom rear, marked in Picture 1

**-Front:** Remove the screw that secures the cushion at the top. Anchor at that point the front of the rack. Used to fix the original screw. (Picture 2)




Picture 1



Picture 2

**- Back:** Set the strips "A" in the anchor noted in Picture 3 by placing between flanges "A" and the sheet anchor  $\text{Ø}16 \times 3$  cap. Use the M8x20 hexagonal screw with a flat washer.

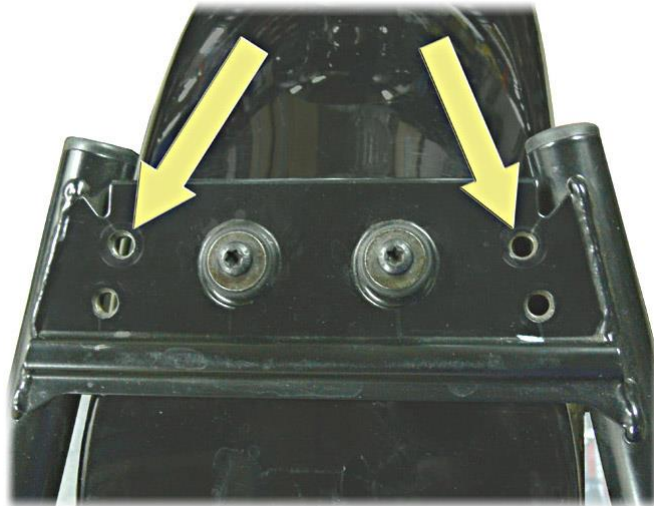

Picture 3

In the free hole of the plate "A" (Picture 4) anchor the back of the rack with screws M8x20, flat washers and lock nuts.



**Picture 4**



*View of the assembled rack*