



## QJMOTOR SRV 125

### SISSYBAR / LUGGAGE RACKS MOUNTING INSTRUCTIONS

#### (1) Sideplates

The side plates of the SPAAN sissybar are placed under the bracket that flank the rear fender.

To mount them, remove the two screws that fix the original bracket and remove it.

Fix the front part of the side plate as can be seen in the first image, with the original screw (A).


Take care that the rear hole of the plate is aligned with the thread of the fender (B).

Place a wide flange washer from the kit between the plate and the fender and another between the plate and the original outer bracket.

Present the external bracket and fix the assembly with the original screw.

The front part of the original side bracket will be fixed with the **ULS M6x30** screw from the kit and the **Ø20x4** bushing from the kit will be placed between the side bracket and the bike.

**PAY ATTENTION** to the two cap bushings installed inside of the original side bracket.

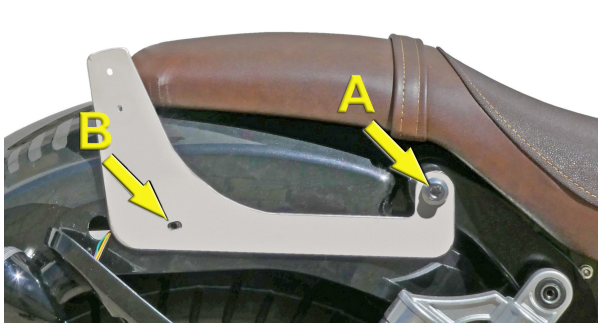

#### (2) Sissybar uprights – luggage rack arch

Fix the sissybar upright (high or low), or in case of a luggage rack or luggage rack **TC**, the luggage rack arch to the sideplates **SPAAN** with the four screws **M6x20**. Put **M6** nuts from the inside.

#### (3) Rack

For installation in luggage racks kits or in any sissybars of our brand **SPAAN**. We must place it the inside of the sissybar uprights or the small arch and fix the assembly with **4** screws **M6x20** and nuts **M6** included in the kit. **In all LUGGAGE RACKS is required to mount the small arch**, to give more rigidity to the assembly.



#### (4) Pad

Join the set with four screws **M5x10** that accompany the kit. (In the back of the pad is marked with four holes in the fabric the position of the threads).

